


## Flowcoat SK (0.3 mm)



Standard colour chart

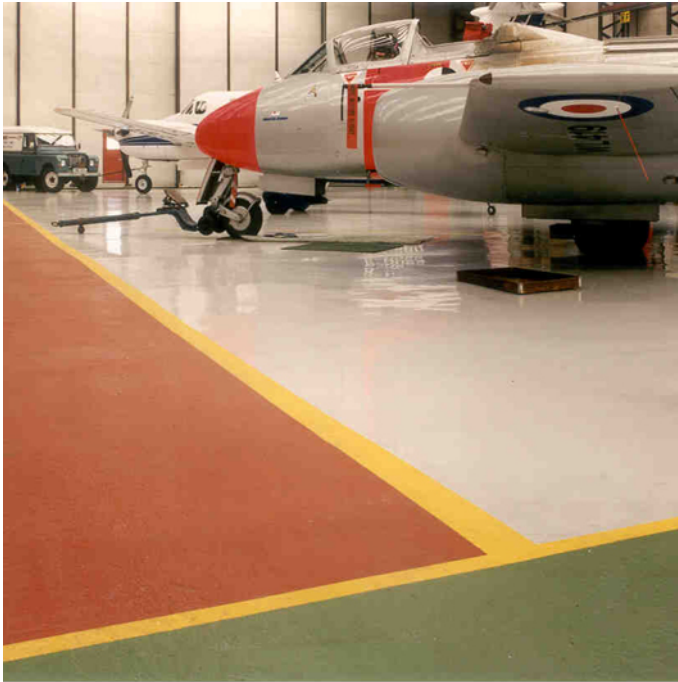

Goosewing Grey 222



Beige 326



Mid Grey 280



Emerald Green 740



Yellow Grey 217



Yellow 340



Tile Red 637



Sky Blue 452

The applied colours may differ slightly from the examples shown above.  
Contact our customer services for a true colour sample or a special colour match.

### Description

High performance coating designed for aircraft hanger floors. Excellent chemical resistant epoxy resin coating, resistant to SKYDROL hydraulic fluids. Different grades of slip resistance can be achieved by inclusion of graded aggregate between coats.

### Uses

Flowcoat SK is designed for aircraft hangers and aerospace industry flooring.


### Benefits:

- Chemically resistant to SKYDROL hydraulic fluids
- Hard wearing
- Abrasion resistant
- Solvent free, low odour
- Aesthetically attractive – brightens up dull factories and warehouses
- Seamless and hygienic finish
- Low maintenance
- Slip resistant finish can be tailored to specific client requirements.

### Project References:-

Aircraft hanger floors at :-  
RAF bases nation wide e.g. RAF Cottesmore,  
RAF Lakenheath, RAF Mildenhall, RAF Sealand plus  
My Travel Jets, Airbus, Raytheon Corporate Jets.

### System Design

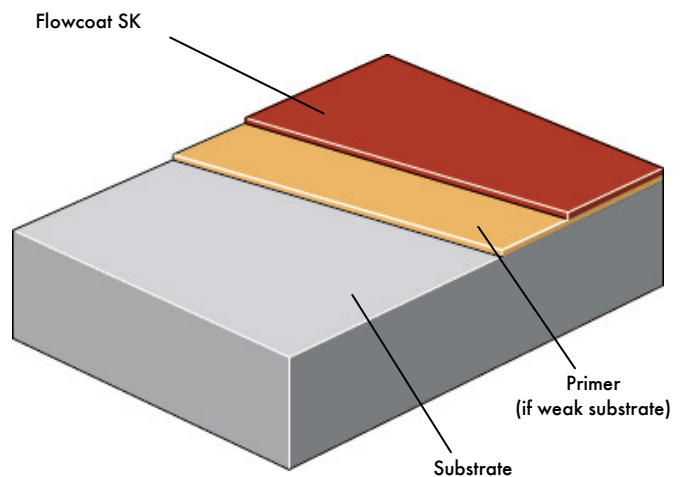

## Model Specification

Product: Flowcoat SK

Finish: Gloss

Thickness: 0.3 mm

Colour: \_\_\_\_\_

Preparatory work and application in accordance with suppliers instructions.

Supplier: Flowcrete UK Ltd

Telephone: Customer Service - +44 (0) 1270 753000

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be dry to 75% RH as per BS8204 and free from rising damp and ground water pressure. If no damp proof membrane is present Hydraseal DPM can be incorporated directly beneath the Flowcoat SK system.

## Products Included in this System

Primer (if weak substrate): Flowprime @ 0.25 kg/m<sup>2</sup>

Coating: Flowcoat SK (density 1.4 kg/l)

(consists of Flowcoat SF41 Base with Flowcoat SK Hardener)

1<sup>st</sup> Coat @ 0.3 kg/m<sup>2</sup>

2<sup>nd</sup> Coat @ 0.2 kg/m<sup>2</sup>

Non Slip finishes: - Various grades of quartz, aluminium oxide, glass spheres or silicon carbide can be incorporated to provide a textured surface.

Detailed application instructions are available upon request.

## Installation Service

The installation should be carried out by a Flowcrete approved contractor with a documented quality assurance scheme.

Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site [www.flowcrete.com](http://www.flowcrete.com)

## Focus on the Floorzone

Flowcrete Group plc are world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing, tank lining systems... to name just a few.

Our objective is to satisfy your Floorzone needs.

## Flooring Design Service

Special corporate colours and designs can be produced to special order.

## Environmental considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning.

Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

## System Performance Guide

Complies with BS 8204-6/FeRFA category 3.

## Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Fire Resistance	BS476:Part 7: Surface spread of flame Class 1 (indicative)
Slip Resistance	TRRL Pendulum Slip Test Dry 60 Wet 35
Temperature Resistance	Soften Over 70°C
Water Permeability	Nil - Karsten test (impermeable)
Surface Hardness	> 180 secs. Koenig Hardness Test
Chemical Resistance	Go to <a href="http://www.flowcrete.com">www.flowcrete.com</a> Resistant to SKYDROL and most aviation fluids.
Abrasion Resistance	Taber Abrader: 10 mg loss per 1000 cycles (1 kg Load using CS17 wheels) BS8204-2: Class AR2
Compressive Strength	> 80 N/mm <sup>2</sup> (BS6319)
Flexural Strength	60 N/mm <sup>2</sup> (BS6319)
Tensile Strength	15 N/mm <sup>2</sup> (BS6319)
Bond Strength	Greater than cohesive strength of 25 N/mm <sup>2</sup> concrete. 1.5 MPa.

## Speed of Cure

	10°C	20°C	30°C
Light traffic	48 hrs	24 hrs	20 hrs
Full traffic	72 hrs	48 hrs	40 hrs
Full chemical cure	12 days	7 days	7 days

## Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

## Life Expectancy

4 years, subject to correct maintenance regime.

## Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

## Further Information

To ensure you are specifying a fit for purpose flooring for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.

**Flowcrete Group plc**  
Booth Lane Moston Sandbach,  
Cheshire CW11 3QF  
UK  
Tel: +44 (0) 1270 753000  
Fax: +44 (0) 1270 753333  
Email: [uk@flowcrete.com](mailto:uk@flowcrete.com)

**Flowcrete Europe Ltd**  
Booth Lane Moston Sandbach  
Cheshire CW11 3QF  
UK  
Tel: +44 (0) 1270 753000  
Fax: +44 (0) 1270 753333  
Email: [uk@flowcrete.com](mailto:uk@flowcrete.com)

**Flowcrete Asia Sdn Bhd**  
Lot 37631 & 37632 Jalan 6/37A  
Taman Bukit Maluri  
Industrial Area Kepong,  
52100 Kuala Lumpur, Malaysia  
Tel: +60 3 6277 9575  
Fax: +60 3 6277 4645  
Email: [malsysia@flowcrete.com](mailto:malsysia@flowcrete.com)

**Flowcrete North America, Inc.**  
11133 I-45 South  
Suite J, Conroe  
Texas 77302  
U.S.A.  
Tel: +1 936 539 6700  
Fax: +1 936 539 6701  
Email: [usa@flowcrete.com](mailto:usa@flowcrete.com)

**Flowcrete**  
for the world at your feet